


FIGURE 10
LONG ISLAND EXPRESSWAY, NEW YORK CITY, NEW YORK

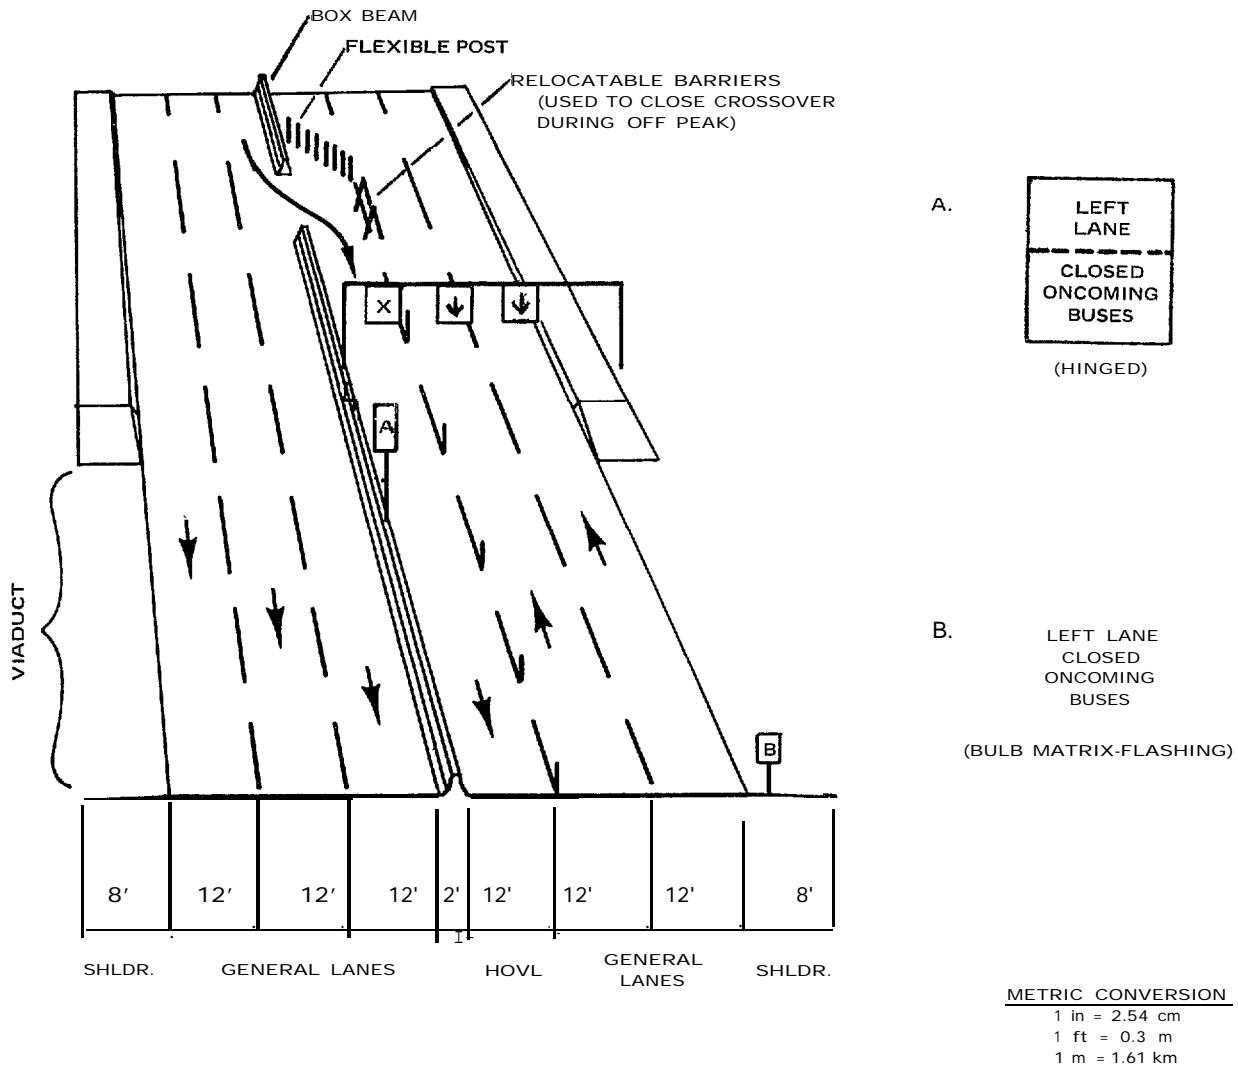

AASHTO DESIGN FACTORS

ALIGNMENT: linear
VERTICAL SIGHT DISTANCE: good
POSTED SPEED: 40-50 mph inbound; 35 mph
 HOVL and outbound
ROADSIDE HAZARDS: none
OTHER HAZARDS: no shoulder over viaduct

MUTCD DESIGN FACTORS

LANE-USE CONTROL SIGNALS: red 'x' and green
 arrows
ADVANCED WARNING SIGNS: non-standard
RESTRICTED LANE SIGNS: non-standard
END OF HOVL SIGNS: none
DIAMOND SYMBOL: none
HOVL DELINEATION: double 4" yellow line and
 flexible posts (40' intervals)

LONG ISLAND EXPRESSWAY, NEW YORK CITY, NEW YORK

